

Schottky Rectifier

Features

- Ideal for automated placement
- Low power losses

Meets MSL level1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications


For use in lighting, fast switching rectification of power suppliers, inverters, converters, and freewheeling diodes for consumer, automotive, and telecommunication.

Mechanical Data

Package: TO-277

Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen free

Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102

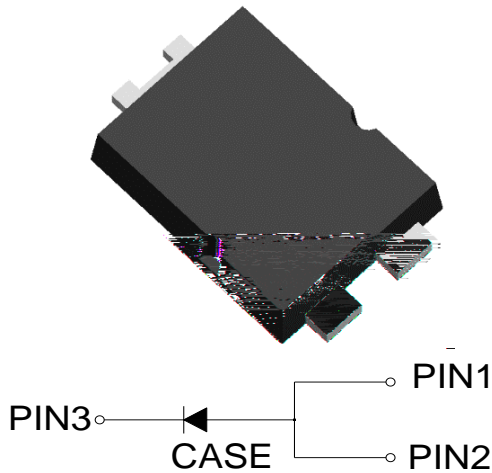

Maximum Ratings ($T_a=25$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS15U100P
Device marking code			SS15U100P
Repetitive Peak Reverse Voltage	V_{RRM}	V	100
Average Rectified Output Current @60Hz -sine wave, R- load, T_c (FIG.1)	I_o	A	15
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_a=25$	I_{FSM}	A	300
Current Squared Time @ $j=25$	I^2t	A^2s	373.5
Storage Temperature	T_{stg}		-55 ~+175
Junction Temperature	T_J		-55 ~+175



SS15U100P

Electrical Characteristics ($T_A=25$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Typ	Max
Instantaneous forward voltage	V_F	V	$I_F=15A$	$T_A=25$	0.78	0.88
			$I_F=15A$	$T_A=125$	0.7	0.8
Leakage Current	I_R	A	$V_R=100V$	$T_A=25$	-	10
		mA		$T_A=125$	-	20

Note1:Pulse test:300uS pulse width,1% duty cycle

Note2:Pulse test:pulse width 40mS

Thermal Characteristics ($T_A=25^{\circ}C$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS15U100P
Typical Thermal Resistance	R_{-A}	/W	75
	R_{-A}	/W	100 ⁽¹⁾
	R_{-C}	/W	5

Note

(1) Thermal resistance from junction to ambient mounted on P.C.B. with 10mm*10mm copper pad areas

Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SS15U100P	F1	Approximate 0.106	5000	80000	

Characteristics (Typical)

Fig.1:Forward Current Derating Curve




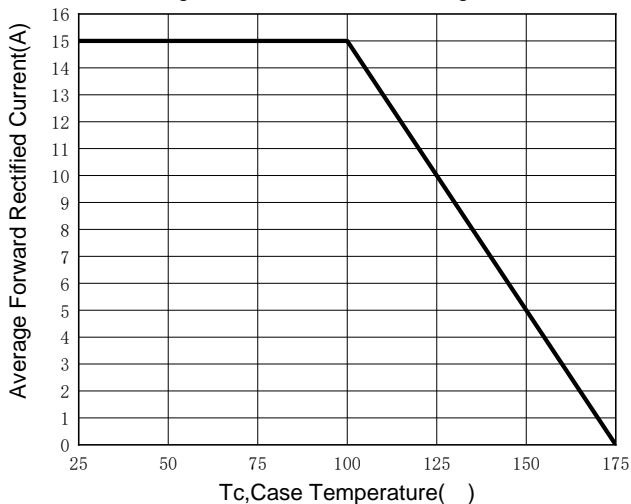


Fig.2:Forward Surge Current Capability

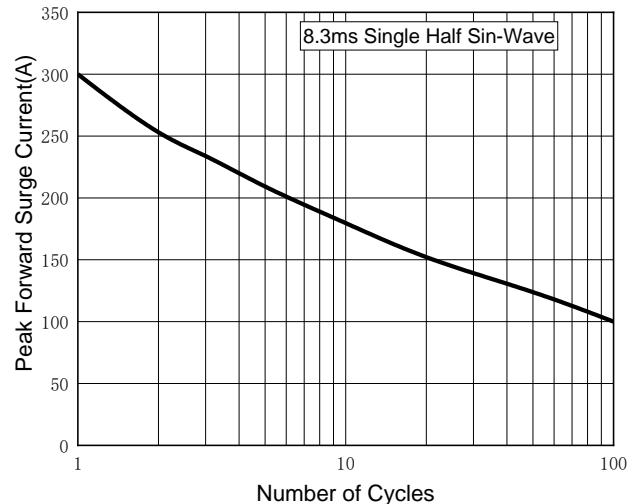


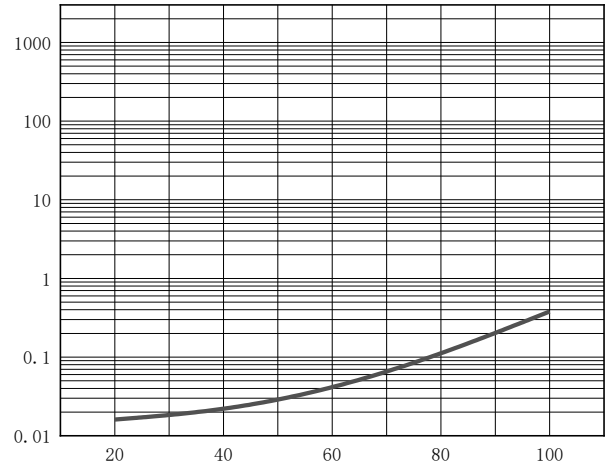


SS15U100P

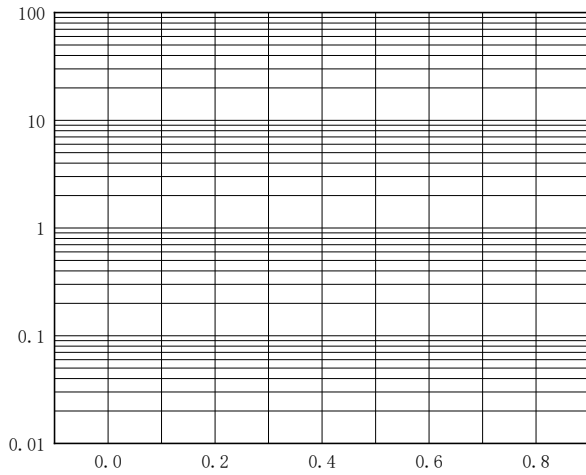

Outline Dimensions



TO-277		
Dim	Min(mm)	Max(mm)
A	3.9	4.1
B	1.7	1.9
C	6.4	6.6
D	5.3	5.5
E	0.8	1.0
F	1.8	1.9
G	0.35	0.45
H	1.10	1.20
I	4.1	4.5
J	1.5	1.9
K	2.9	3.4
L	0.55	0.7

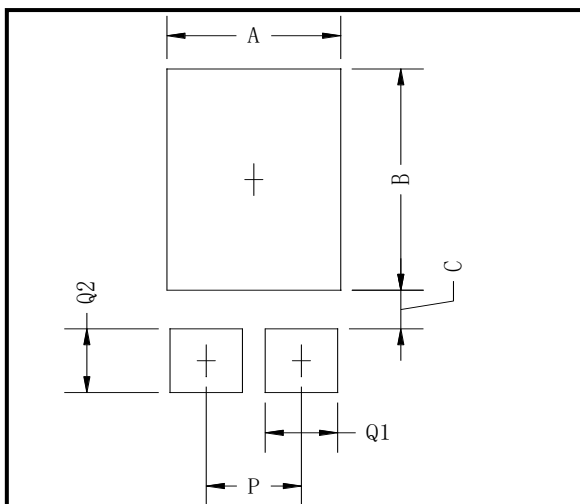

Dim	Min(mm)
A	3.36
B	4.86
C	0.85
P	1.84
Q1	1.4
Q2	1.4



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie sales office for further assistance.